


# Component range

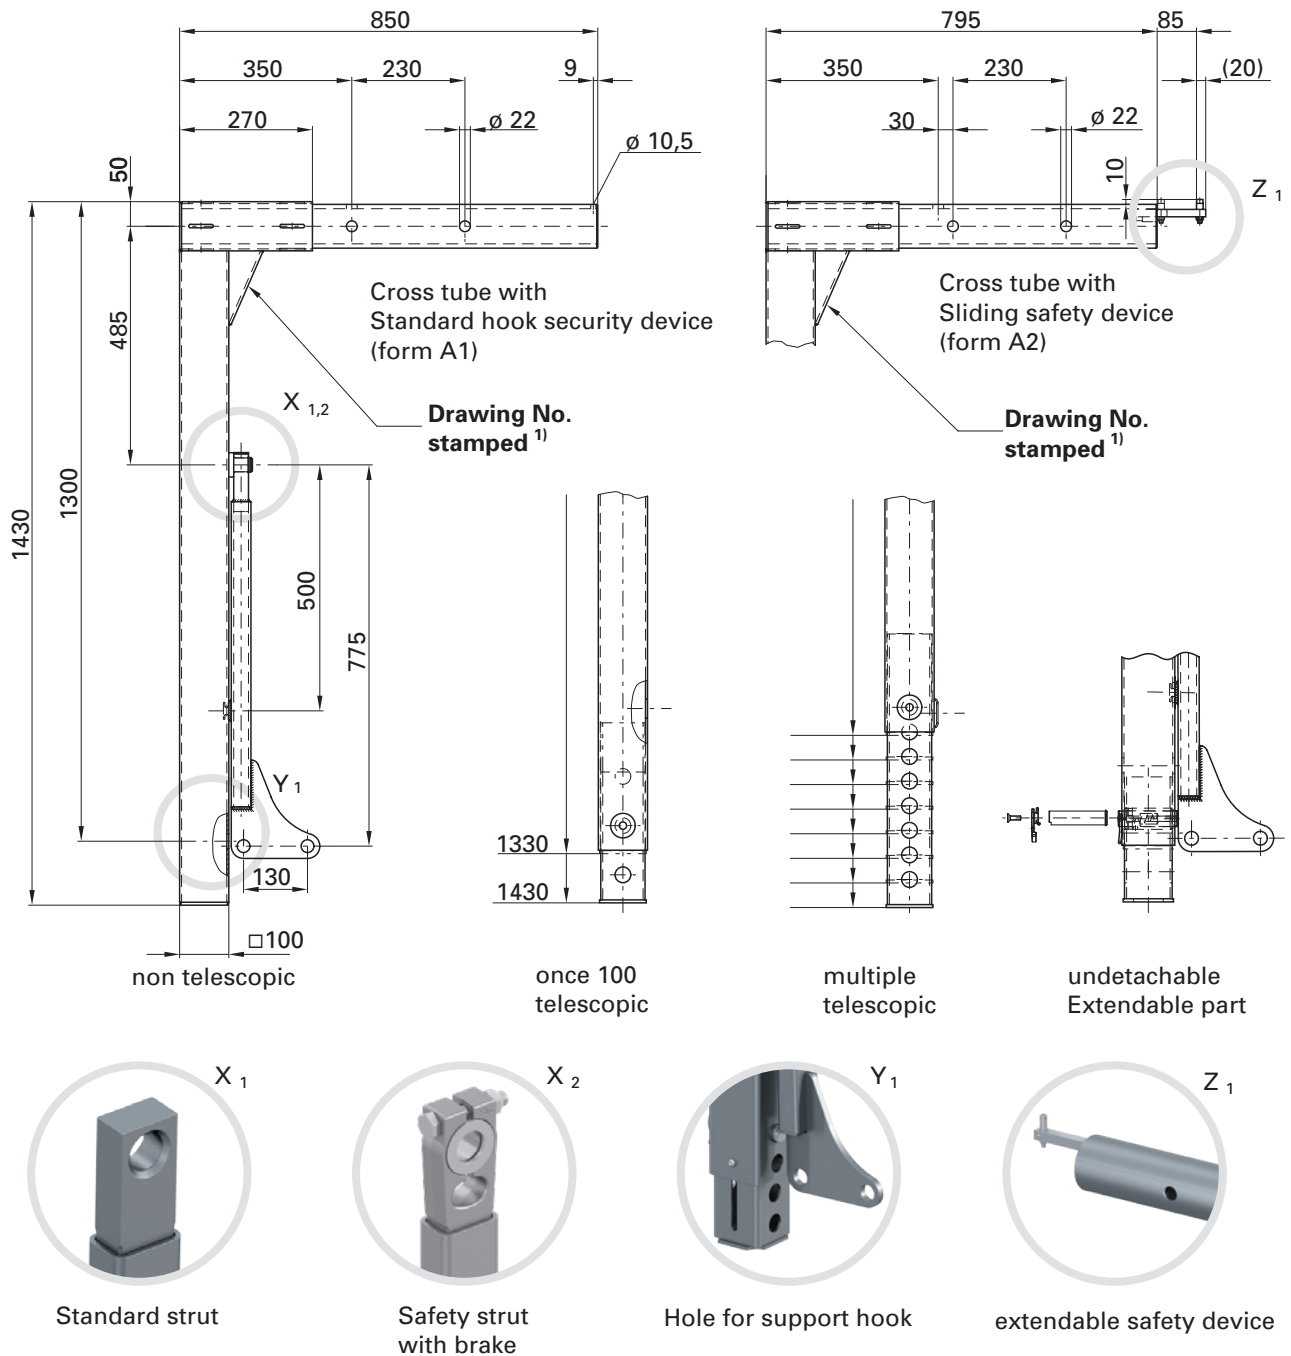

1) For all types with a welded node plate.

For series RS 7080 and RS 7090 the Drawing No. is stamped on the external reinforcement.

# Component range


## All support leg versions

- Embossed, 9-digit part number in the gusset plate between support tube and standpipe
- Specification when exchanging easy, clear, quick
- Individualised arrangement of spare parts (e.g. strut) easily accomplished via parts list



## For undetachable telescopic legs (S-Version)

- Increased safety and ease of use thanks to keyhole principle
- Robust execution due to a catch plate with a tailored design and large grip disc on the bolt
- Resistant to climatic conditions

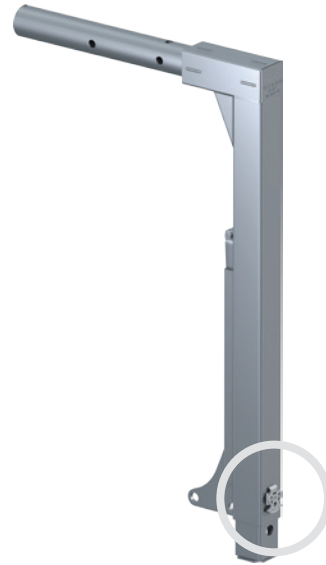

## Strut bearing

- Bearing bolt with welding plate D = 60 mm
- Increased stability when loading forklift



## For standard telescopic legs

- Linch pin instead of safety pin
- Easier handling



## Special models

- Manufacturing of customer-specific special models possible

**Individual and competent consulting on all questions concerning construction, application and use of alternating systems.**

## Coating

- JOST internal e-coating
- High level of corrosion protection
- Wide range of RAL colours for final powder coating possible
- Hot-dip galvanised